QUESTIONS & ANSWERS

Kill your exam at first Attempt





Network-Appliance

NS0-162

NetApp Certified Data Administrator, ONTAP







Question: 85

You must expand an existing FAS8200 switchless cluster to a switched cluster and add a new FAS8200 HA pair in the cluster.

In this scenario, which three actions would you perform to expand the cluster? (Choose three.)

- A. Ensure that the switchless-cluster network option is false.
- B. Connect the existing nodes to the cluster switches.
- C. Change the cluster ports for the existing HA pair.
- D. Ensure that the switchless-cluster network option is true.
- E. Join the new HA pair to the cluster.



Question: 86

When performing a manual MetroCluster switchover, which two statements are true? (Choose two.)

- A. Only the user specified DR groups are switched over.
- B. All SVMs in the disaster site are switched over.
- C. All DR groups in the disaster site are switched over.
- D. Only the user specified SVMs are switched over.

Answer: BC

Question: 87

Which three steps are required to serve NFS exports from your ONTAP system? (Choose three.)

- A. You must create an export policy rule.
- B. You must license CIF
- D. You must create an SMB share.
- E. You must license NF
- G. You must have provisioned a volume to export.

Answer: ADE

Question: 88

Which three name services are supported with NFS? (Choose three.)

A. NetBIOS

B. WINS

- C. External NIS domains (NIS)
- D. External LDAP domains (LDAP)
- E. Local Users (file)

Answer: CDE

Question: 89

Exhibit:

na01::> network fcp adapter show -adapter 0e -fields fc-wwnn,fc-wwpn node adapter fc-wwnn fc-wwpn

na01-03 0e 50:0a:09:80:80:01:b7:1b 50:0a:09:82:80:01:b7:1b na01-04 0e 50:0a:09:80:80:d1:b7:1c 50:0a:09:82:80:d1:b7:1c

na01::> network interface show -vserver san1 -home-port 0e
 (network interface show)
 Logical Status Network Current Current Is

Vserver Interface Admin/Oper Address/Mask Node Port Horesan1

san1-03_fcA up/up 20:0d:00:a0:98:69:97:ff na01-03 0e true san1-04_fcA up/up 20:0f:00:a0:98:69:97:ff na01-04 0e true

You have a 2-node ONTAP cluster with both 0e ports connected to Fabric A.

You have an FC host connected to the FC fabric with the following initiator WWNs:

- WWNN: 20:00:00:25:B5:01:F0:2A

- WWPN Fabric A: 20:00:00:25:B5:01:A0:2A

Referring to the exhibit, which three WWNs should be configured in a zone together? (Choose three.)

A. 20:0d:00:a0:98:69:97:ff

B. 20:00:00:25:B5:01:F0:2A

C. 20:0f:00:a0:98:69:97:ff

D. 50:0a:09:82:80:01:b7:1b

E. 20:00:00:25:B5:01:A0:2A

Answer: ACE

Question: 90

Exhibit:



A storage administrator has an existing FAS2554 HA pair. They want to add a new FAS2620 HA pair to the cluster. The SAN protocols are licensed.

Referring to the exhibit, after adding the second HA pair, how many more nodes are available to add for future use?

A. 4


B. 8

C. 2

D. 12

Answer: D

Question: 91



- A. All Snapshot copies that were created after the Snapshot copy was created are lost.
- B. All data that was written to the volume after the Snapshot copy was created is lost.
- C. The volume's SnapMirror relationships need to be re-created.
- D. After the volume is restored, it becomes read-only.

Answer: BC

Question: 92

Which two features are supported on NetApp ONTAP? (Choose two.)

A. SnapMirror

B. FlexCache

C. Fibre Channel

D. Storage Pool

Answer: AB

Question: 93

Exhibit:



You have a FAS8200 HA pair with disks that are evenly split between nodes A and B. When a disk fails, the replacement disk must automatically assign back to the originally assigned controller, A or B.

Referring to the exhibit, which disk auto assign policy satisfies this requirement?

A. stack

B. bay

C. default

D. shelf

Answer: D

Question: 94

Exhibit:

IPspace	Vserver List	Broadcast Domains	
Cluster			
	Cluster	Cluster	
Default			
	svm1, svm2, cluster1	Default	
IPspace1			
-	SVM1A, SVM2A,	IPspace1	
IPspace2		-	
-	SVM2A, SVM2B,	IPspace2	

You execute the cluster1::> network ipspace showcommand, and notice that two IPspaces are not able to be renamed or deleted.

Referring to the exhibit, what are these two IPspaces? (Choose two.)

- A. IPspace2
- B. Default
- C. IPspace1
- D. Cluster

KILL EXAMS

Answer: BD

Question: 95


How would you protect a NAS SVM root volume?

- A. Create a SnapMirror copy of the root volume to a peer cluster.
- B. Create load-sharing mirrors.
- C. Create a backup the SVM configuration.
- D. Create a backup of the SVM root volume.

Answer: B

Question: 96

Click the Exhibit button.

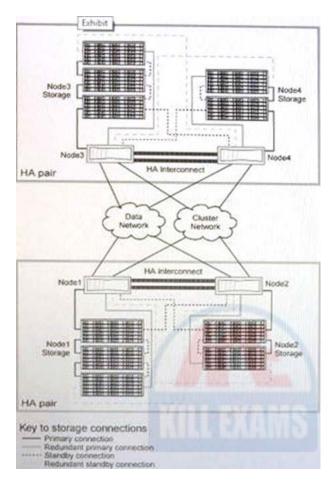



Referring to the exhibit, what is a valid storage failover scenario?

- A. Node 1 fails and Node 2 takes over Node 1's storage.
- B. Node 4 fails and Node 2 takes over Node 4's storage
- C. Node 3 fails and Node 1 takes over Node 3's storage.
- D. Node 2 fails and Node 3 takes over Node 2's storage.

Answer: A

Question: 97

What are three types of licenses available for ONTAP? (Choose three.)

A. standard

B. evaluation

C. system

D. site

E. field

Answer: ABD

Question: 98

Exhibit:

::> vserver export-policy rule create -vserver vsl -policyname test

-clientmatch 10.64.18.0/24 -rorule any -rwrule any -protocol nfs3 -ruleindex 1 - anon 70

The rule created above is verified by using the command that follows:

::> vserver export-policy rule show

Vserver	Policy	Rule	Access	Client	RO
	Name	Index	Protocol	Match	Rule
vs1	test	1	nfs3	10.64.18.0/24	any

An export policy rule for a volume is set by using the command shown in the exhibit.

If clients with IP addresses 10.64.19.0 and 10.64.18.20 accessed the export, what is the outcome?

- A. Neither client is given access.
- B. Client 10.64.19.0 is given access but 10.64.18.20 is not given access.
- C. Client 10.64.19.0 is not given access but 10.64.18.20 is given access.
- D. Both clients are given access.

Answer: C

Question: 99

When you create a FlexVol volume, which security style is applied by default?

- A. the security style of the SVM root volume
- B. the security style of the root volume of the cluster
- C. NTFS
- D. UNIX

Answer: B

Question: 100

An administrator is designing an ONTAP solution that consists of eight FAS8200 nodes in a single cluster. Each node will use four ports for cluster connections.

Which cluster interconnect switch model should be used in this scenario?

- A. Nexus 5596UP
- B. Nexus 5010
- C. CN1610
- D. CN1601

Answer: A

For More exams visit https://killexams.com/vendors-exam-list

